


F0337 / F0338 | 16" Manhole Cover

FEATURES AND BENEFITS

- * Pressure and vacuum vent fitted as standard for tank breathing. Various ratings are available to suit operational requirements. Two vents may be fitted if required.
- * Spring-loaded fill cap provides emergency fire engulfment venting to NTTC DOT 406, required in the event of the tank being exposed to a fire.
- * Emergency venting capacity 7000 m³/h air at 350 mb.
- * Automatic sealing of the P/V vent in a roll over situation prevents dangerous and costly spillage.
- * Steel cover arm exceeds the requirements of the Australian DROP test (AS 2809-2-1990).
- * Aluminium cover arm is also available on some variants.
- * Self-aligning seal ensures pressure tight operation at all times.
- * Two-stage opening allows safe release of residual compartment pressure before fully opening fill cap.
- * Secure 24-bolt fixing.
- * 250 mm (10") fill hole for easy drop pipe insertion when top loading.
- * Lightweight aluminium baseplate for increased payloads.
- * High quality die cast baseplate and fillcap, to international standards, are used for durability and performance.
- * Low profile design minimises roll over protection requirements.
- * Lockable options use a standard F0053 key.
- * Two accessory ports for either dip-tube mandrel, over-spill prevention probe or an additional P/V vent.

APPROVALS

- * Steel cover arm exceeds Australian DROP test (AS 2809-2-1990)
- * Emergency fire engulfment venting to NTTC DOT 406

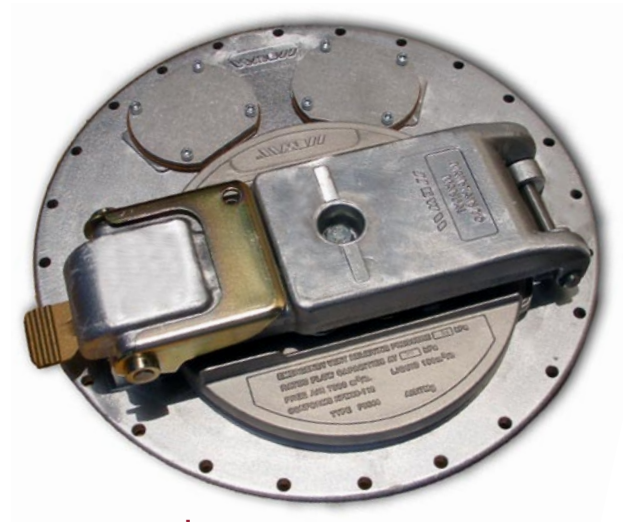

F0337 Left handed variant

Internationally accepted, and specified, by oil companies around the world to assist with the safe conveyance of petroleum-based products, the Emco Wheaton range of manhole covers offers unrivalled safety features and operational benefits.

WHEN SPECIFYING F0337/F0338 MANHOLE COVERS FOR YOUR VEHICLE, THE FOLLOWING POINTS SHOULD BE CONSIDERED:

- * Ensure 16" manhole covers are suitable for the orifice in the tank top, i.e. a 16" (410 mm) diameter hole.
- * Which P/V vent rating and arrangement is required?
- * Which material of cover arm is required; plated steel or cast aluminium?
- * Remember to specify the F0053001 Manhole Cover Key if you have specified a lockable variant.
- * Do you require left or right hand (this refers to the orientation of the accessory ports)?

F0337 / F0338

F0337 / F0338 | 16" Manhole Cover


TYPE / WEIGHTS

Steel Cover Arm	9.2 kg
Aluminium Cover Arm	8.4 kg

VARIANTS

F0337	Left Hand
F0338	Right Hand

MANHOLE ORIENTATION

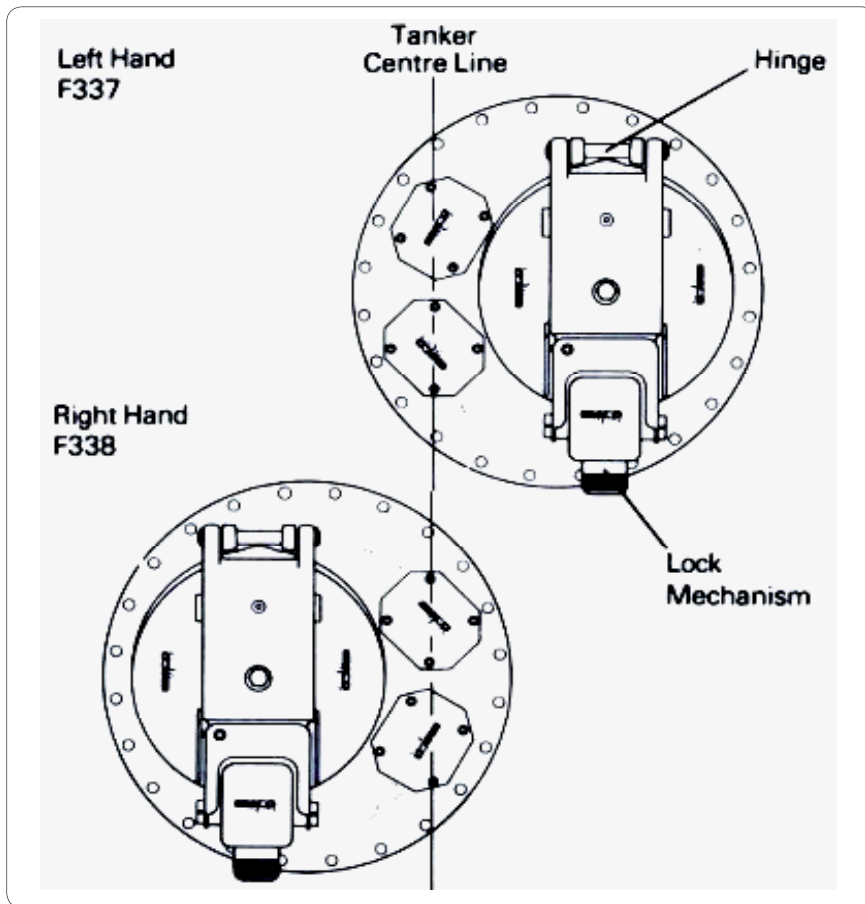

As a part of a continuous commitment to product development the company reserves the right to alter the specification of its products without prior notice

Sheet Ref. CSF0337/8 - May 2006 - Revision 0

EMCOWHEATON

A Gardner Denver Product

Better by Design



EMCO WHEATON-UK Limited
Channel Road · Westwood Industrial Estate
Margate, Kent CT9 4JR · UK
Phone + 44 1843 221521 · Fax +44 1843 295444
www.emcowheaton.com · assist@emcowheaton.com